

DESCRIPTION

- G3/4" inlets
- Quarter turn ceramic cartridges
- Diverter between bath spout and hand shower


FLOW

- Recommended installation pressure 0.5 bar / 7.5 PSI
- Maximum 5 bar / 75 PSI
- 16L / min at 0.5 bar
- 32L / min at 3 bar

WARRANTY


- www.perrinandrowe.co.uk

SPECIFICATIONS

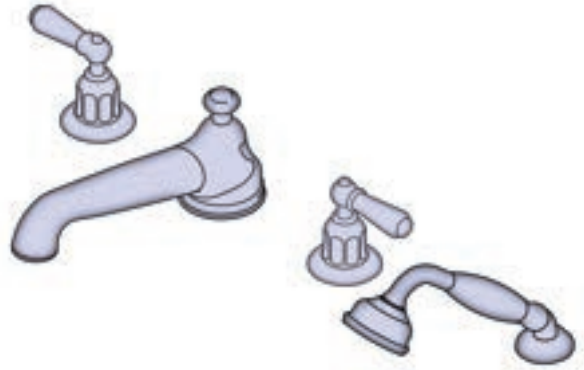

Traditional 4 Hole Deck Mounted Bath Set with Lever Handles

MODELS: E.3737

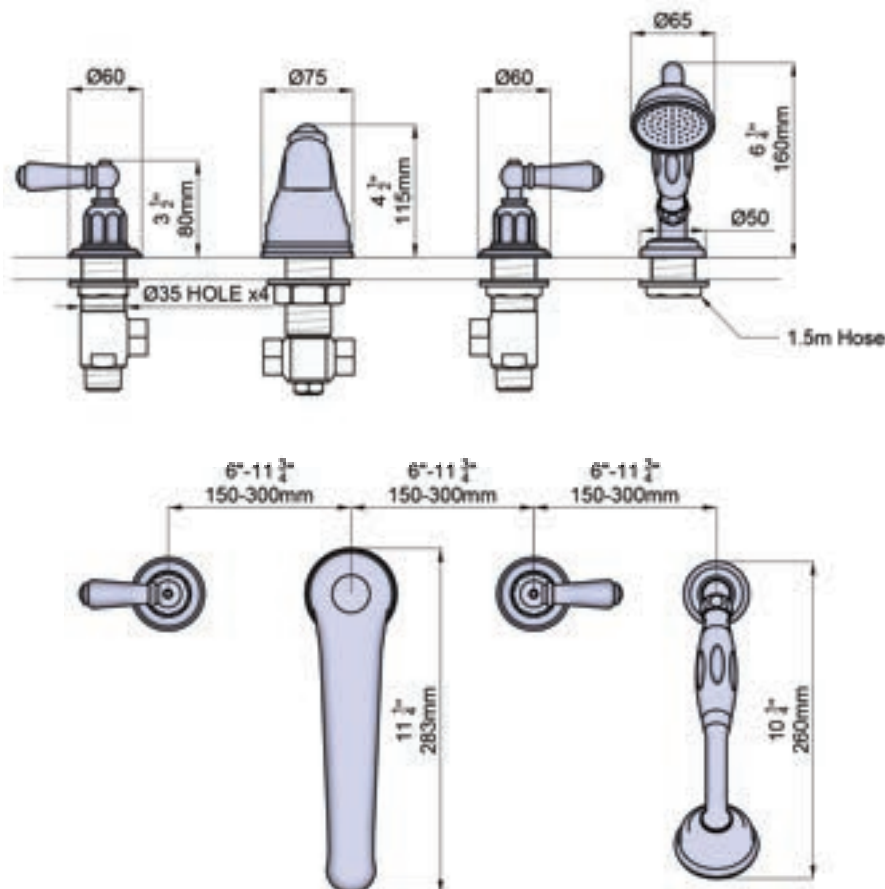

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

BESCHREIBUNG

- G3/4" Zugänge
- Keramikkartuschen mit Vierteldrehung
- Umsteller zwischen Wanneneinlauf und Handbrause


DURCHFLUSSMENGE

- Empfohlener Installationsdruck 0.5 bar / 7.5 PSI
- Maximum 5 bar / 75 PSI
- 16L / min at 0.5 bar
- 32L / min at 3 bar

GARANTIE


- www.perrinandrowe.co.uk

TECHNISCHE DATEN

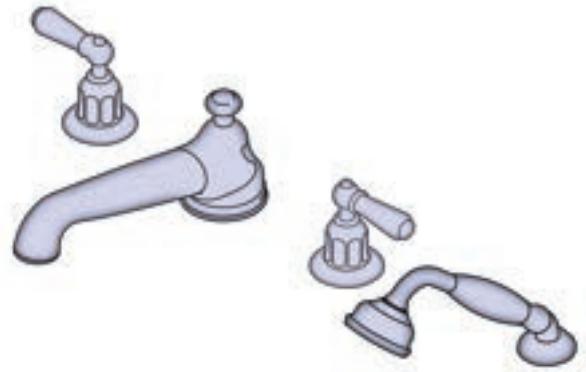

4-Loch Wannenarmatur mit Hebelgriffen für Aufsatzmontage

MODELLE: E.3737

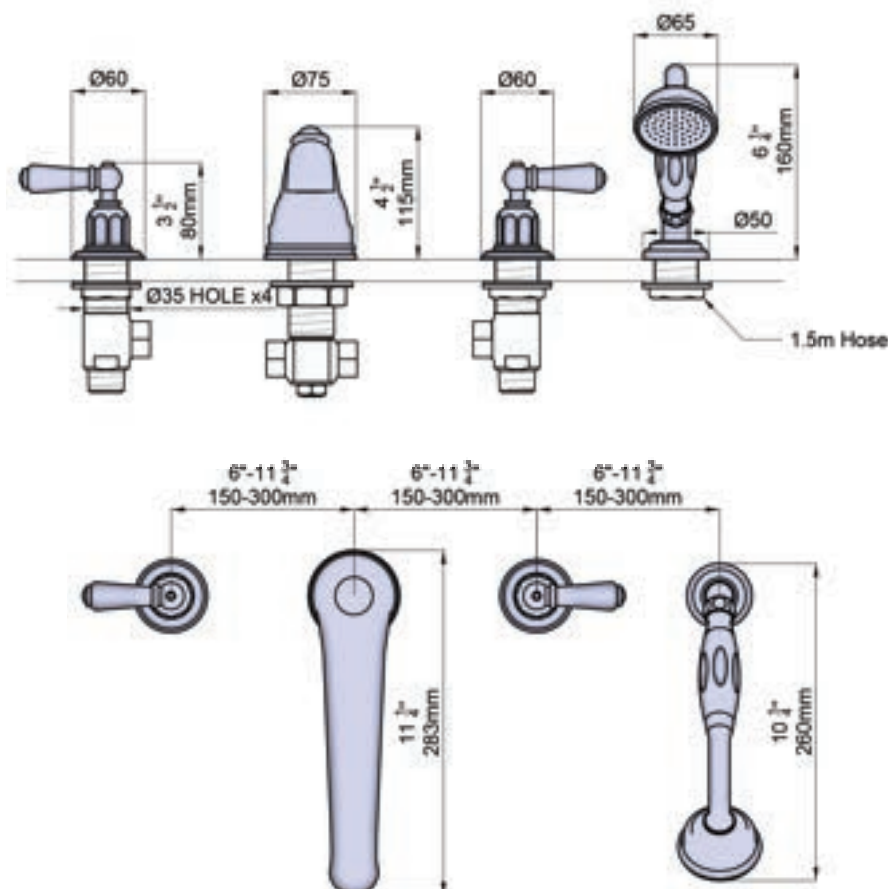

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

DESCRIPCIÓN

- G3/4" Entradas
- Montura cerámica de un cuarto de vuelta
- Desviador entre el caño de la bañera y la ducha


CAUDAL

- Presión de instalación recomendada 0.5 bar / 7.5 PSI
- Máximo 5 bar / 75 PSI
- 16L / min at 0.5 bar
- 32L / min at 3 bar

GARANTÍA


- www.perrinandrowe.co.uk

CARACTERÍSTICAS TÉCNICAS

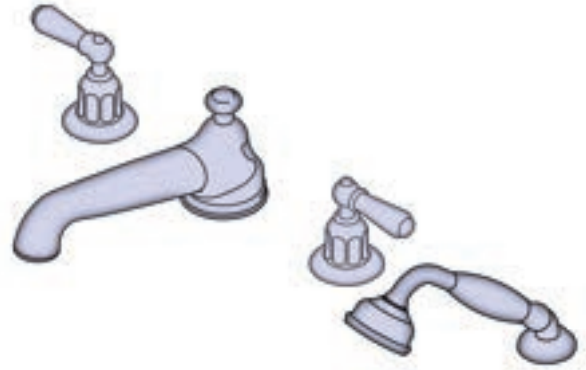

**Mezclador bimando baño-ducha
de 4 agujeros de repisa.
Manetas de tipo palanca**

MODELOS: E.3737

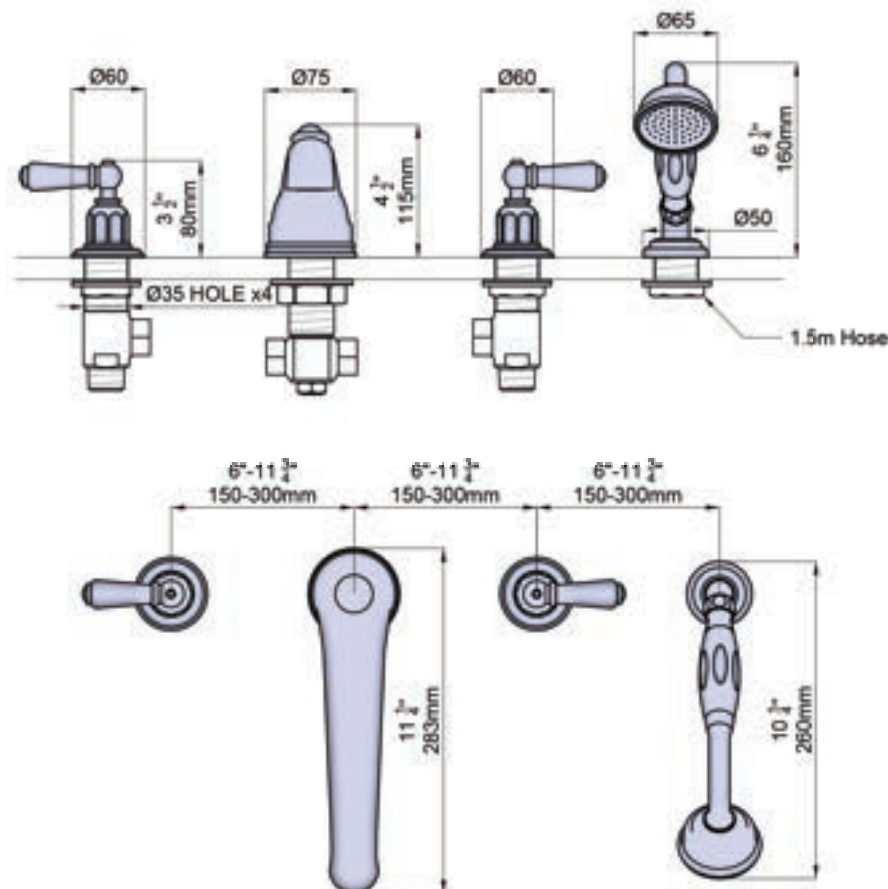

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

DESCRIPTION

- G3/4" Entrées
- Tête céramiques quart de tour
- Inverseur entre le bec de baignoire et la douchette


DÉBIT

- Pression d'installation recommandée 0.5 bar / 7.5 PSI
- Maximum 5 bar / 75 PSI
- 16L / min at 0.5 bar
- 32L / min at 3 bar

GARANTIE


- www.perrinandrowe.co.uk

CARACTÉRISTIQUES TECHNIQUES

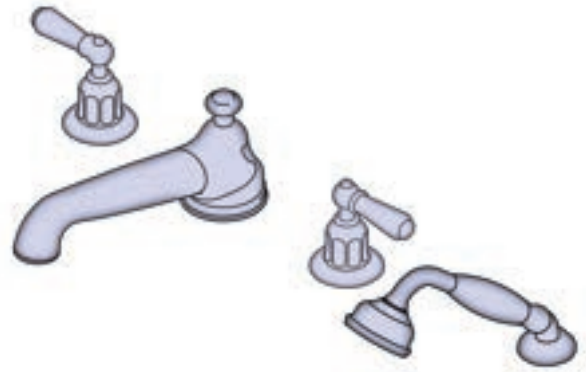

Mélangeur bain-douche 4 trous sur plan. Poignées type levier

MODÈLES: E.3737

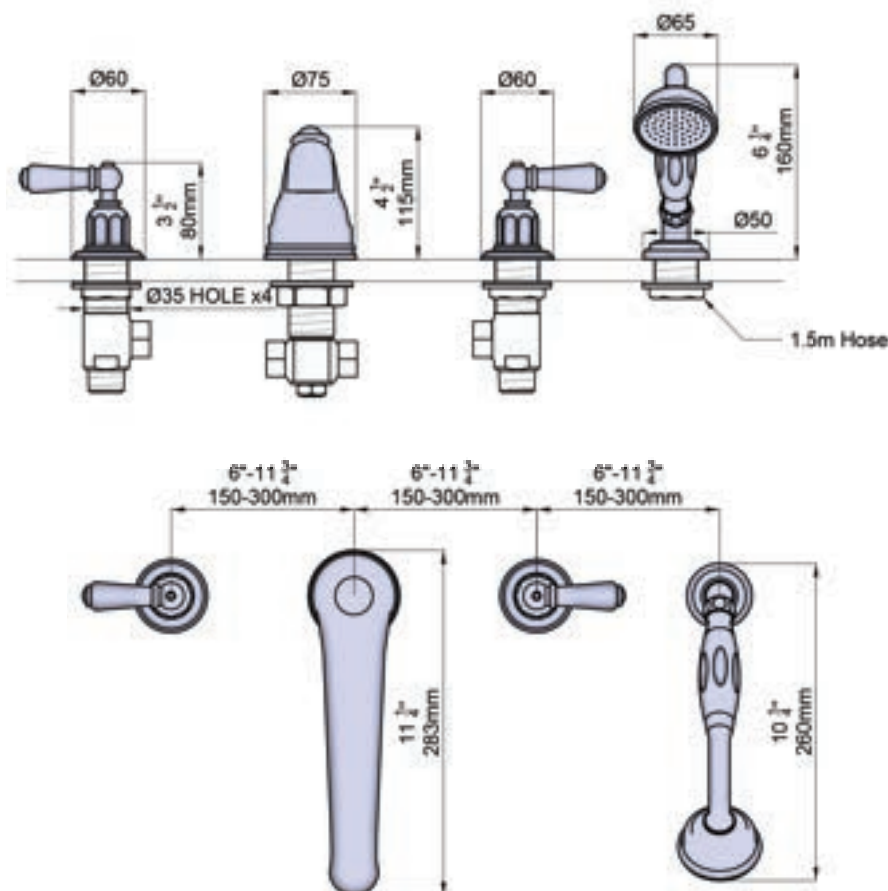

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

DESCRIZIONE

- G3/4" Ingressi
- Cartucce ceramiche con quarto di giro
- Deviatore tra la bocca di erogazione per vasca e doccia

FLUSSO

- Pressione consigliata per l'installazione 0.5 bar / 7.5 PSI
- Massimo 5 bar / 75 PSI
- 16L / min at 0.5 bar
- 32L / min at 3 bar

GARANZIA


- www.perrinandrowe.co.uk

SPECIFICHE



**Set per vasca da bagno
montato sul piano a quattro
fori e maniglie a leva**

MODELLI: E.3737

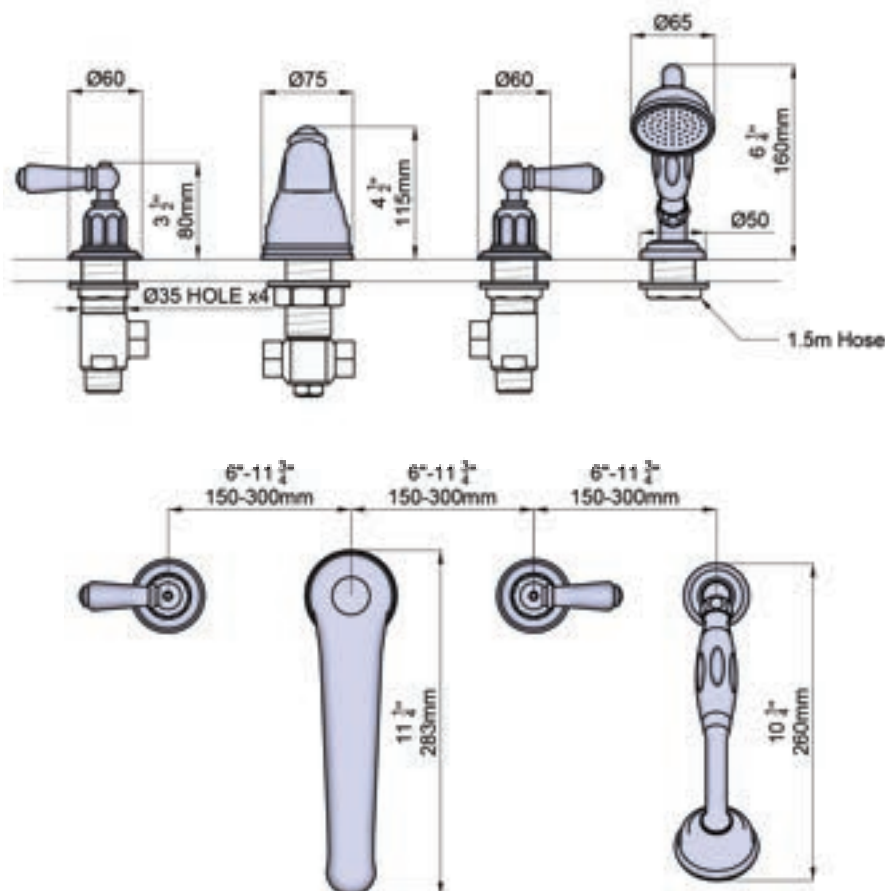

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

BESCHRIJVING

- G3/4" Ingangen
- Kwartslag keramische cartridge
- Omstelling tussen baduitloop en handdouche


STROMINGSDRUK

- Aanbevolen installatiedruk 0.5 bar / 7.5 PSI
- Maximaal 5 bar / 75 PSI
- 16L / min at 0.5 bar
- 32L / min at 3 bar

GARANTIE


- www.perrinandrowe.co.uk

SPECIFICATIES

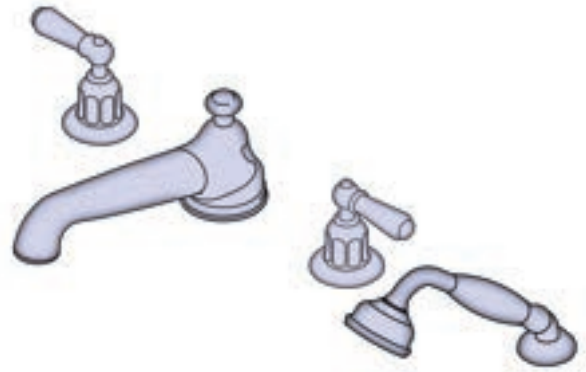

4-gats badrandcombinatie met hendelgrepen

MODELLEN: E.3737

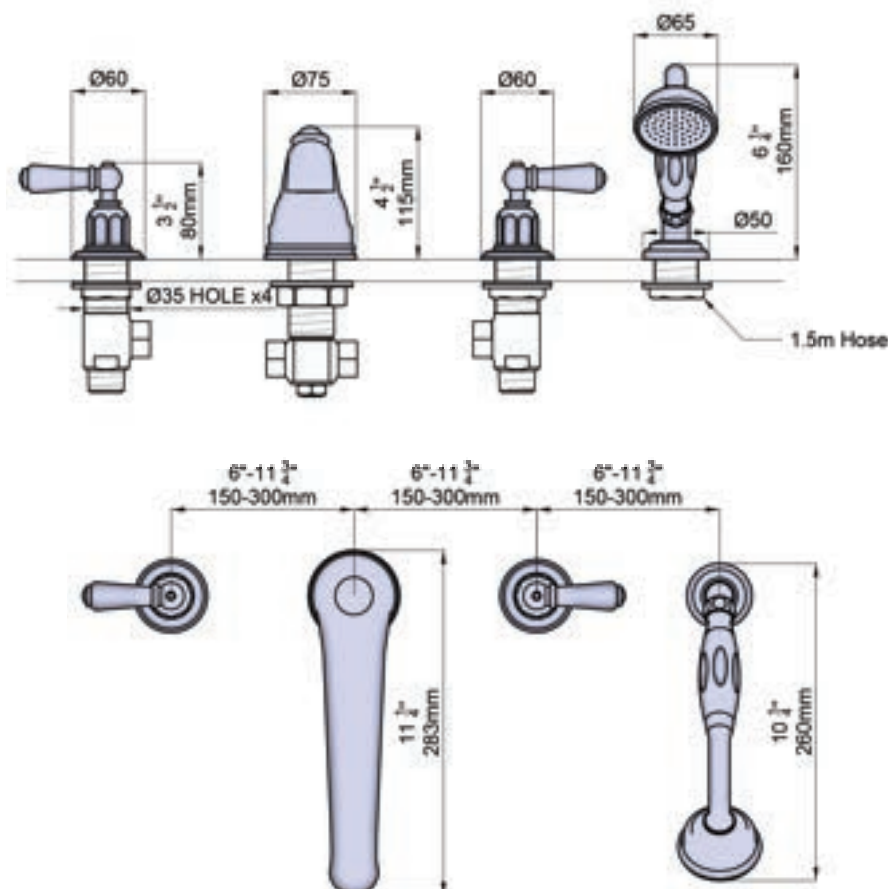

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL