

DESCRIPTION

- Quarter turn ceramic cartridges
- G3/4" inlets
- Fixed rough


FLOW

- Recommended installation pressure 0.5 bar / 7.5 PSI
- Maximum 5 bar / 75 PSI
- 11L / min at 0.5 bar
- 21L / min at 3 bar

WARRANTY



- www.perrinandrowe.co.uk

SPECIFICATIONS

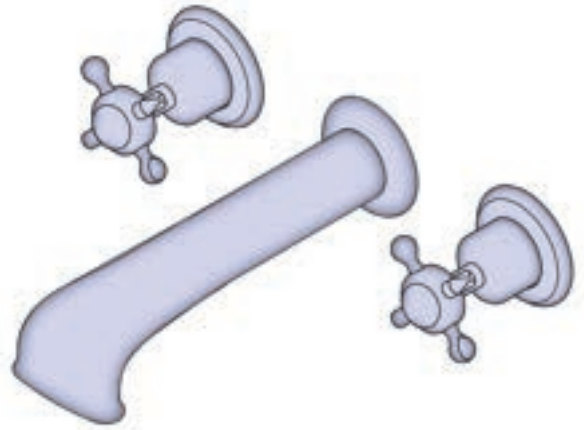

Traditional 3 Hole Wall Mounted Bath Filler with Crosstop Handles

MODELS: E.3594

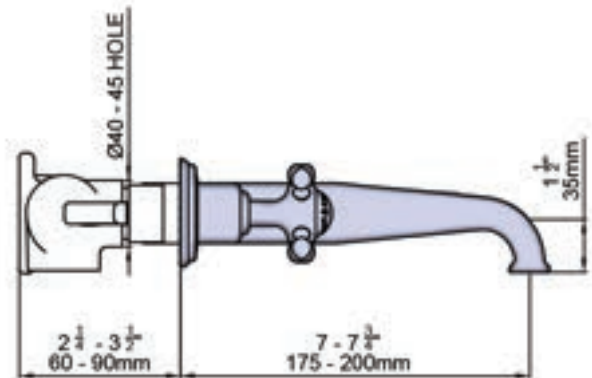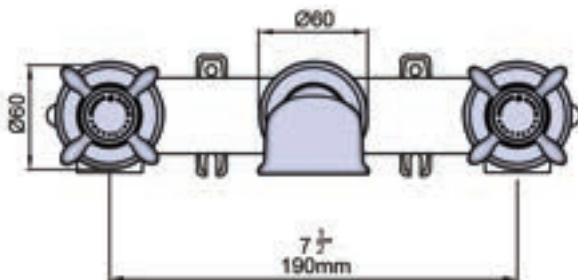

www.perrinandrowe.co.uk
+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

BESCHREIBUNG

- Keramikkartuschen mit Vierteldrehung
- G3/4" Zugänge
- Festes Unterputzteil


DURCHFLUSSMENGE

- Empfohlener Installationsdruck 0.5 bar / 7.5 PSI
- Maximum 5 bar / 75 PSI
- 11L / min at 0.5 bar
- 21L / min at 3 bar

GARANTIE



- www.perrinandrowe.co.uk

TECHNISCHE DATEN

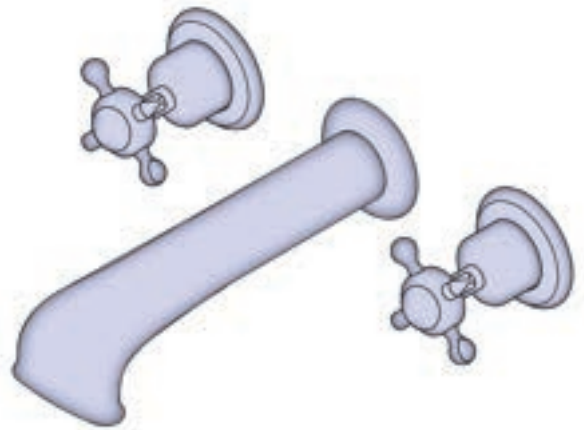

3-Loch Badewannen-Armatur für Wandmontage mit Kreuzkopfgriffen

MODELLE: E.3594

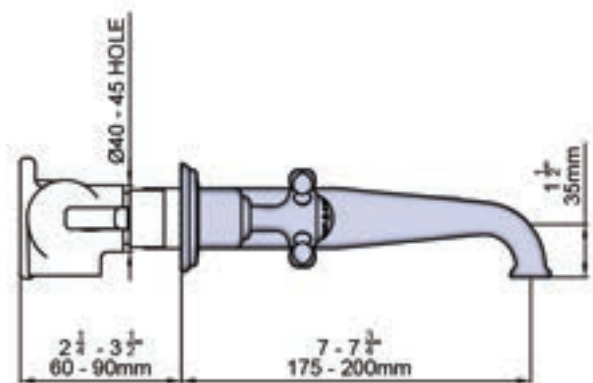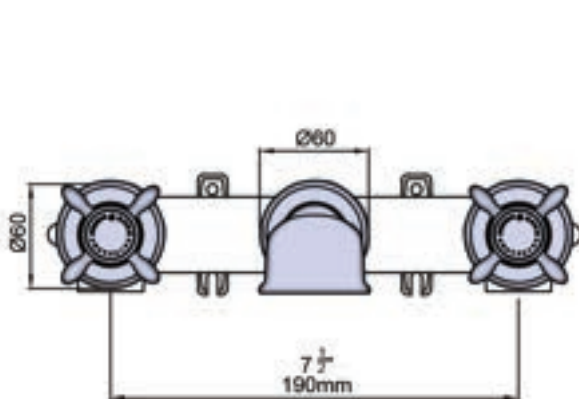

www.perrinandrowe.co.uk
+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

DESCRIPCIÓN

- Montura cerámica de un cuarto de vuelta
- G3/4" Entradas
- Cuerpo empotrado


CAUDAL

- Presión de instalación recomendada 0.5 bar / 7.5 PSI
- Máximo 5 bar / 75 PSI
- 11L / min at 0.5 bar
- 21L / min at 3 bar

GARANTÍA



- www.perrinandrowe.co.uk

CARACTERÍSTICAS TÉCNICAS

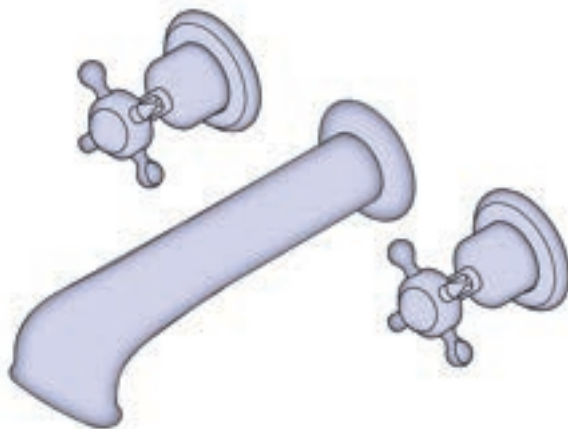

**Mezclador bimando de
3 agujeros mural para bañera.
Manetas tipo cruceta**

MODELOS: E.3594

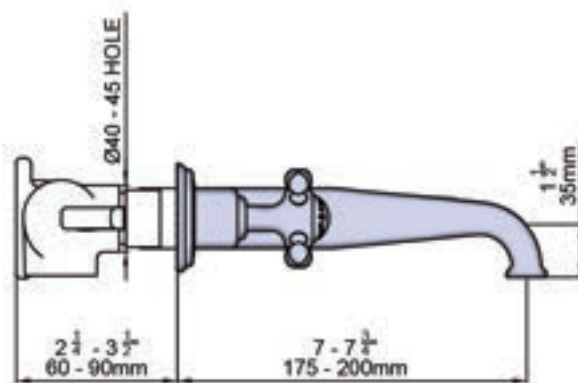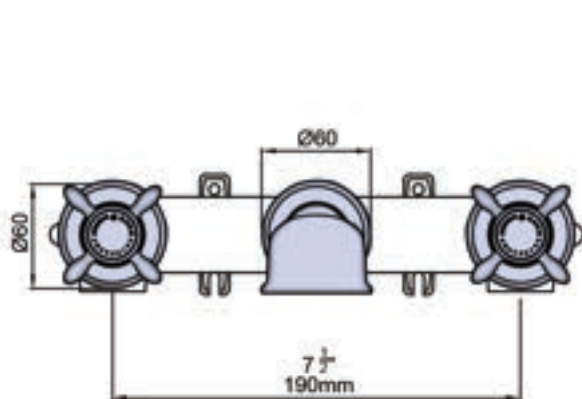

www.perrinandrowe.co.uk

+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

DESCRIPTION

- Tête céramiques quart de tour
- G3/4" Entrées
- Corps encastré


DÉBIT

- Pression d'installation recommandée 0.5 bar / 7.5 PSI
- Maximum 5 bar / 75 PSI
- 11L / min at 0.5 bar
- 21L / min at 3 bar

GARANTIE



- www.perrinandrowe.co.uk

CARACTÉRISTIQUES TECHNIQUES

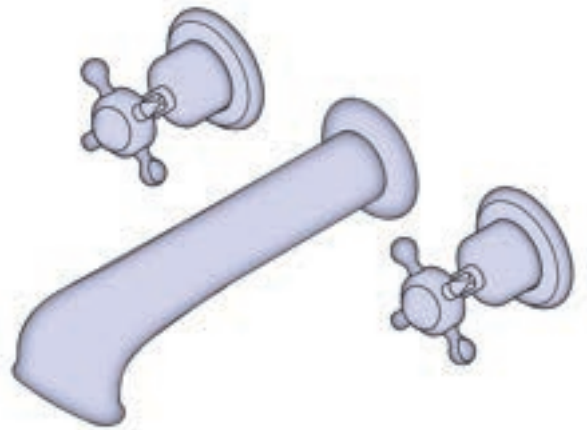

Mélangeur bain 3 trous mural avec poignées type croisillon

MODÈLES: E.3594

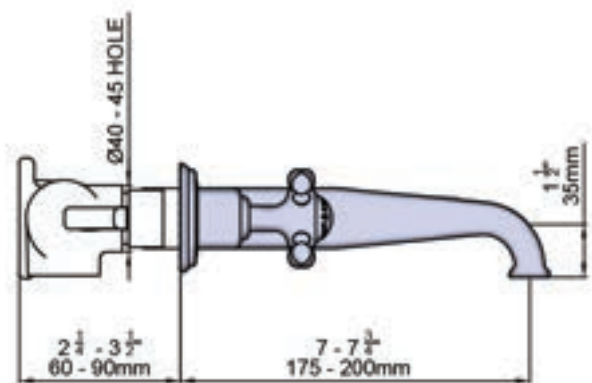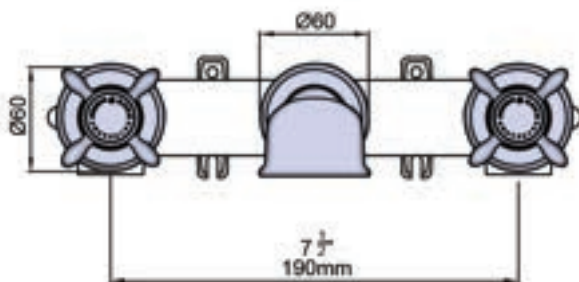

www.perrinandrowe.co.uk
+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

DESCRIZIONE

- Cartucce ceramiche con quarto di giro
- G3/4" Ingressi
- Incasso fisso


FLUSSO

- Pressione consigliata per l'installazione 0.5 bar / 7.5 PSI
- Massimo 5 bar / 75 PSI
- 11L / min at 0.5 bar
- 21L / min at 3 bar

GARANZIA



- www.perrinandrowe.co.uk

SPECIFICHE

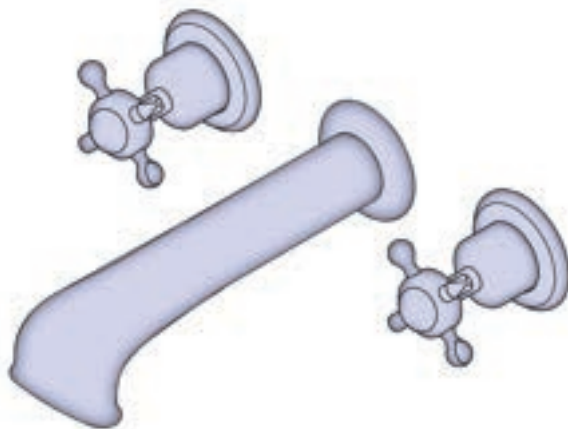

**Miscelatore per vasca
a muro a tre fori e
maniglie a croce**

MODELLI: E.3594

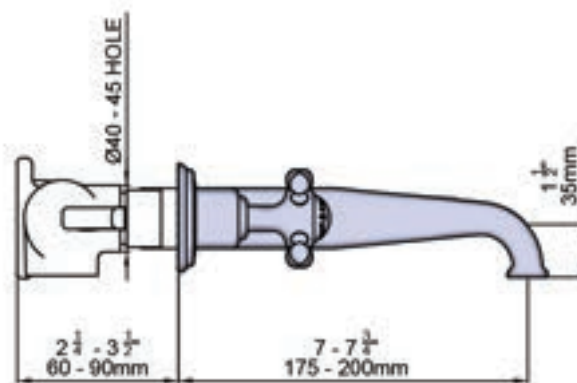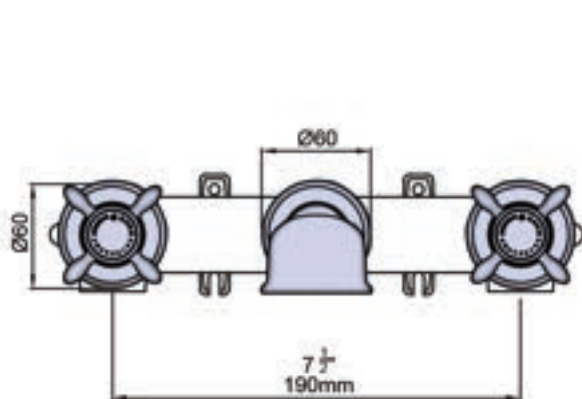

www.perrinandrowe.co.uk
+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL

BESCHRIJVING

- Kwartslag keramische cartridge
- G3/4" Ingangen
- Inbouwdeel


STROMINGSDRUK

- Aanbevolen installatiedruk 0.5 bar / 7.5 PSI
- Maximaal 5 bar / 75 PSI
- 11L / min at 0.5 bar
- 21L / min at 3 bar

GARANTIE



- www.perrinandrowe.co.uk

SPECIFICATIES

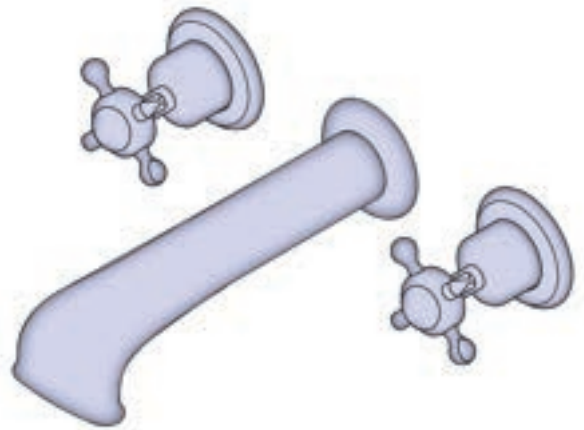

3-gats badvuller voor wandmontage met kruisgrepen

MODELLEN: E.3594

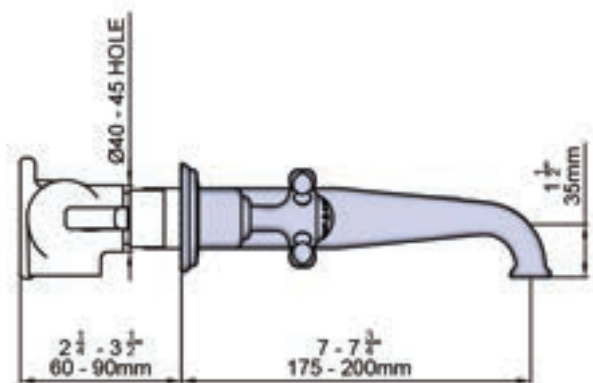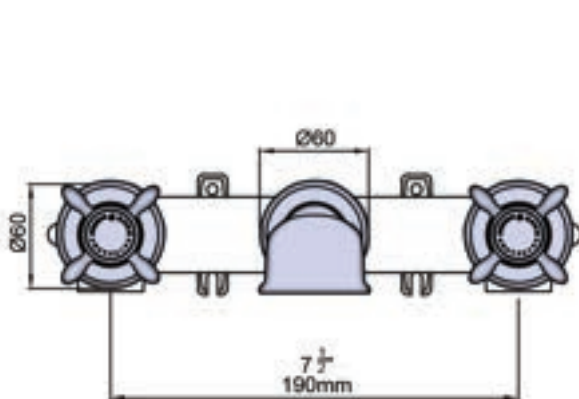

www.perrinandrowe.co.uk
+44 (0) 1708 526 361

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL