

SPECIFICATIONS

DESCRIPTION


- Quarter turn ceramic cartridge
- G1/2" inlet and outlets

FLOW

- Recommended working pressure 0.5 bar/7.5PSI
- Maximum 5 bar/ 75 PSI
- 8L /min at 0.5 bar
- 17L /min at 3 bar



WARRANTY

- www.perrinandrowe.co.uk

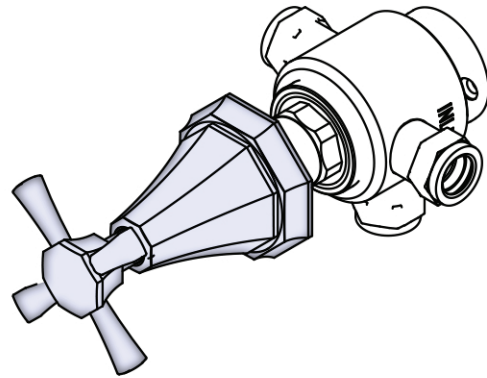

Deco Concealed Diverter 1 Inlet, 2 Outlets with Crosstop Handle

MODELS: 5142

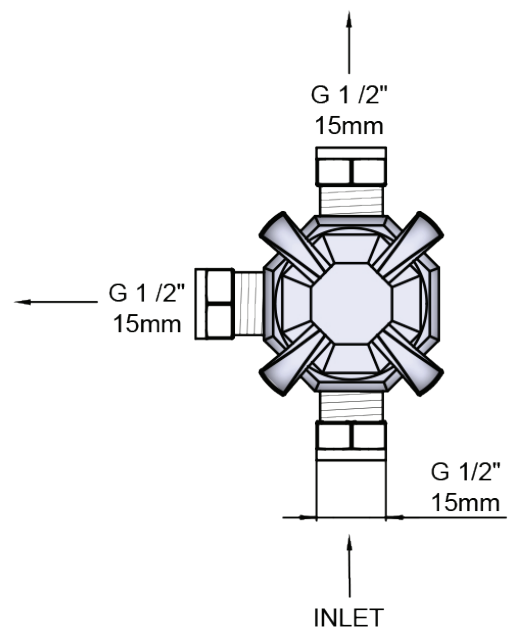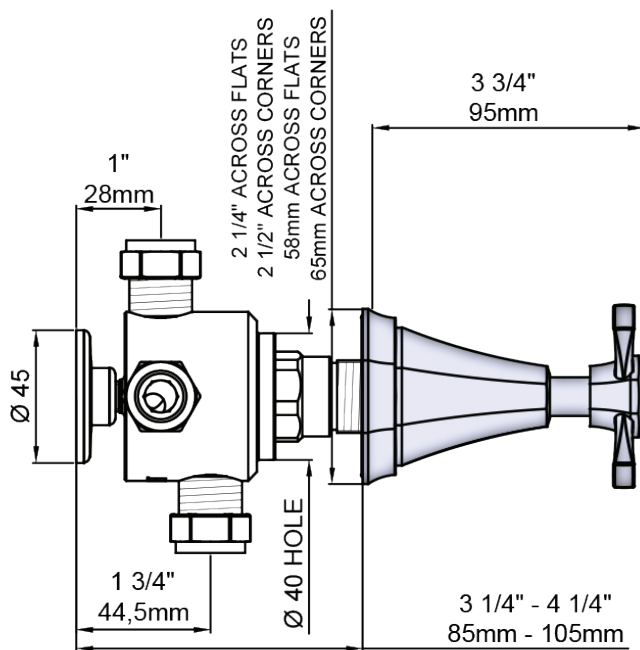

+44 (0) 1708 526 361

www.perrinandrowe.co.uk

A DISTINCTIVE MEMBER OF THE HOUSE OF ROHL